


PAPER MENU



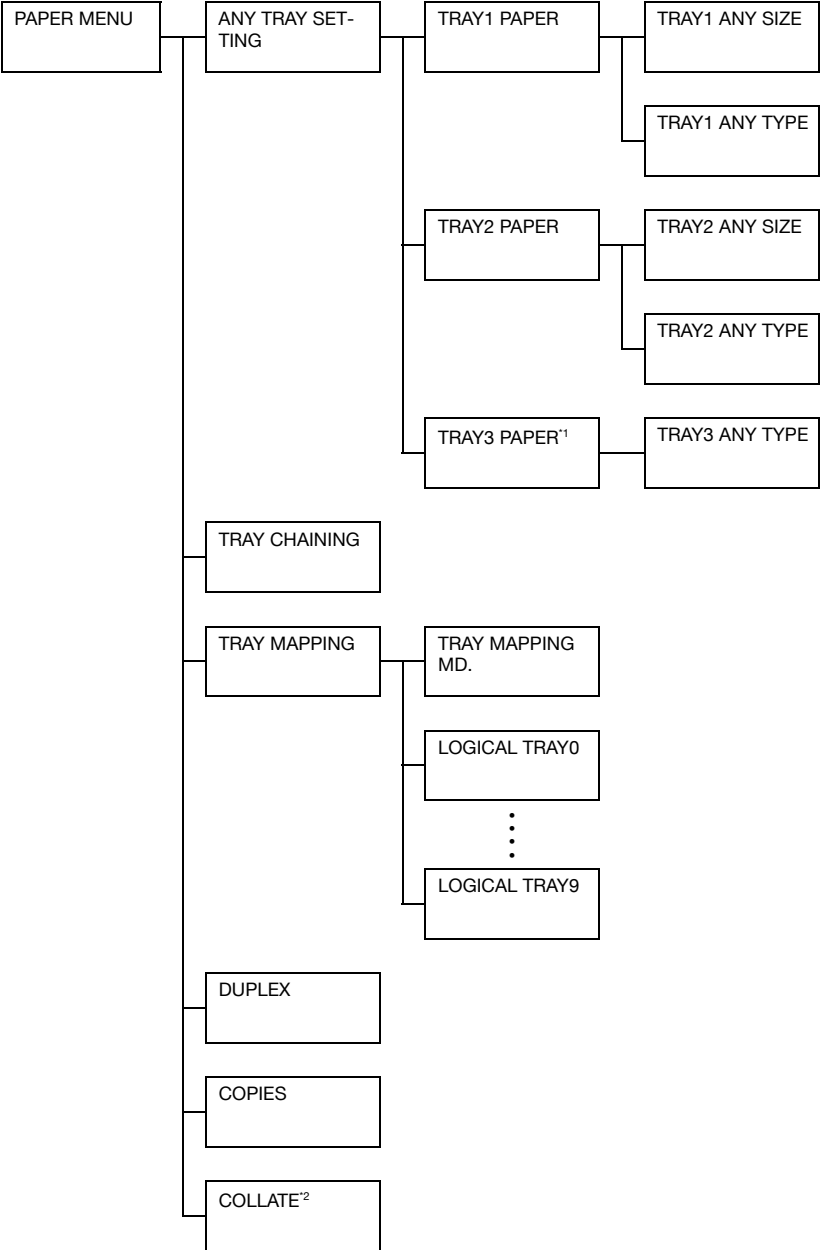


¹ This menu item appears only if an optional Lower Feeder Unit PF-P09 is installed.

² This menu item appears only if an optional Hard Disk Kit HD-P03 or a CompactFlash card of 1 GB or more is installed.



Manufacturer's default settings appear in bold.

[ANY TRAY SETTING]	[TRAY1 PAPER]	[TRAY1 ANY SIZE]	Settings	[ON] / [OFF]
			Select whether or not the Any Paper Size setting is selected for Tray 1.	
		[TRAY1 ANY TYPE]	Settings	[ON] / [OFF]
			Select whether or not the Any Media Type setting is selected for Tray 1.	
	[TRAY2 PAPER]	[TRAY2 ANY SIZE]	Settings	[ON] / [OFF]
			Select whether or not the Any Paper Size setting is selected for Tray 2.	
		[TRAY2 ANY TYPE]	Settings	[ON] / [OFF]
			Select whether or not the Any Media Type setting is selected for Tray 2.	
[TRAY3 PAPER]	[TRAY3 ANY TYPE]	Settings	[ON] / [OFF]	
		Select whether or not the Any Media Type setting is selected for Tray 3.		
[TRAY CHAINING]			Settings	[ON] / [OFF]
			<p>If [ON] is selected and the specified tray runs out of paper during printing, a tray loaded with paper of the same size is automatically selected so printing can continue.</p> <p>If [OFF] is selected and the specified tray runs out of paper, printing stops.</p>	

[TRAY MAP- PING]	[TRAY MAPPING MD.]	Settings	[ON] / [OFF]
		Select whether or not the Tray Mapping function is used.	
	[LOGICAL TRAY0] - [LOGICAL TRAY9]	Settings	[PHYSICAL TRAY1] / [PHYSICAL TRAY2] / [PHYSICAL TRAY3]
		Select the tray that is used for printing when a print job is received from another manufacturer's printer driver.	
		The default settings are [PHYSICAL TRAY1] for [LOGICAL TRAY1] and [PHYSICAL TRAY2] for other trays.	
		 <i>[PHYSICAL TRAY3] appears only if an optional Lower Feeder Unit PF-P09 is installed.</i>	
[DUPLEX]		Settings	[OFF] / [LONG EDGE] / [SHORT EDGE]
		<p>If [LONG EDGE] is selected, the pages will be printed on both sides of the paper for long-edge binding.</p> <p>If [SHORT EDGE] is selected, the pages will be printed on both sides of the paper for short-edge binding.</p> <p>The setting specified in the printer driver will override this menu setting.</p>	
[COPIES]		Settings	1-9999 (Default: [1])
		<p>Specify the number of copies to be printed.</p> <p>The setting specified in the printer driver will override this menu setting.</p>	
[COLLATE]		Settings	[ON] / [OFF]
		<p>Select whether or not to enable collated (sort) printing.</p> <p>The setting specified in the printer driver will override this menu setting.</p>	